




LOS ANGELES AREA (800) 366-3473
 NEW YORK AREA (800) 526-4592
 CHICAGO AREA (800) 547-3473
 ATLANTA AREA (800) 762-0542

Call Potter Roemer for current listings and approvals. Dimensions are subject to manufacturer's tolerances, and change without notice. We assume no responsibility for use of superseded or void data.



WHEELED FIRE EXTINGUISHERS

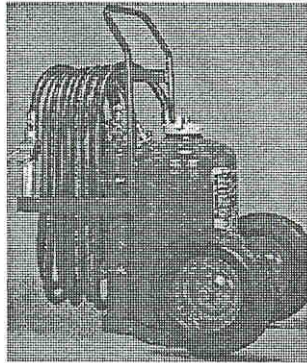

□ 3500 SERIES



□ 3600 SERIES

3500 SERIES DRY CHEMICAL TYPE

REGULARLY FURNISHED: Red glossy polyester coated steel cylinder, carriage and hose hanger assembly. Quick release, non-kink hose with positive grip nozzle. Semi-pneumatic tires. Size, agent, and method of operation as selected by Model Number.

3500 SERIES CARBON DIOXIDE TYPE

REGULARLY FURNISHED: Red glossy polyester coated steel cylinder, black carriage. Quick release, non-kink hose with shock resistant, rubber insulated horn and handle. Diffusion tip and safety release disc in discharge valve. Semi-pneumatic tires. Sizes as selected by Model Number.

✓ Model No.	Type	Agent	Function	Size lbs. / kg	Method of Separation	UL/Rating (Minimum Rating)	Overall			Hose Length ft. / m
							HEIGHT in. / cm	WIDTH in. / cm	DEPTH in. / cm	
3510	ABC Multi-purpose Dry Chemical	Ammonium Phosphate		50 / 22.6	SP	30A:160B:C	46" / 116.8	21 1/2" / 54.6	24" / 60.9	25' / 7.6
3520	ABC Multi-purpose Dry Chemical	Ammonium Phosphate		125 / 56.7	NC	40A:240B:C	45" / 114.3	24" / 60.9	36" / 91.4	50' / 15.2
3525	ABC Multi-purpose Dry Chemical	Ammonium Phosphate		125 / 56.7	SP	40A:240B:C	59" / 149.8	29" / 73.6	42" / 106.6	50' / 15.2
3530	Purple-K Dry Chemical	Potassium Bicarbonate		50 / 22.6	SP	160B:C	46" / 116.8	21 1/2" / 54.6	24" / 60.9	25' / 7.6
3540	Purple-K Dry Chemical	Potassium Bicarbonate		125 / 56.7	NC	240B:C	45" / 114.3	24" / 60.9	36" / 91.4	50' / 15.2
3545	Dry Chemical	Sodium Bicarbonate		50 / 22.6	SP	160B:C	46" / 116.8	21 1/2" / 54.6	24" / 60.9	25' / 7.6
3550	Dry Chemical	Sodium Bicarbonate		150 / 60	NC	240B:C	45" / 114.3	24" / 60.9	36" / 91.4	50' / 15.2
3610	Carbon Dioxide	Carbon Dioxide		50 / 22.6	SE	10B:C	47" / 119.5	23 / 58.4	48" / 121.9	15' / 4.5
3620*	Carbon Dioxide	Carbon Dioxide		100 / 45.3	SE	20B:C	47" / 119.5	23 / 58.4	48" / 121.9	40' / 12.1

*3620 provided with two cylinders

METHOD OF OPERATION:

SP= Stored Pressure

SE= Self Expellant

NC= 23 Cubic Feet / 7 Cubic Meters Nitrogen Cylinder with Handwheel Valve

DATE:
JULY 2002

MEMBERS:



MODEL NUMBER

3510 - 3620