


SPECIFICATIONS

Potter Roemer/ Fire Pro® Oscillating Monitor conversion kits are designed for refineries, aircraft hangers, underwing and fuselage protection, fuel transfer areas, and any high-risk areas where unmanned coverage is essential. Brass and stainless steel construction. Standard red powder coating gives a tough corrosion resistant finish.

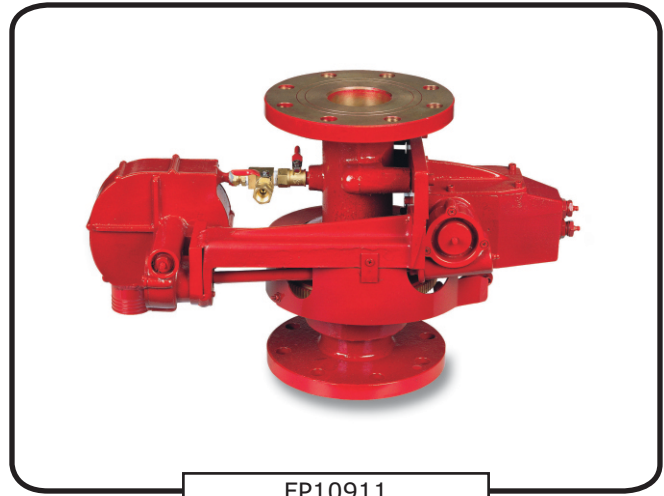

FP10911

REGULARLY FURNISHED

- 3" Waterway
- Brass and stainless steel construction
- Available with 3" or 4" ANSI flange
- Adjustable oscillation by 7.5° through 360°
- Maximum 1250 GPM (4732 lpm)
- Weight 90 Lbs (41 kg)

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacture's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superceded data. Please visit potterroemer.com for most current specifications

FP10911

Revised:09/04/18

MEMBERSHIP



POTTER ROEMER/FIRE PRO

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (866) 961-3473
Dallas (866) 644-3473

www.potterroemer.com