

SPECIFICATIONS

POLY FLEX HOSE

500 lb. ACCEPTANCE TEST & 250 lb. SERVICE TEST - 100% synthetic jacket with extended polyurethane inner lining. Size as selected by model number.

SUPER POLY FLEX HOSE

500 lb. ACCEPTANCE TEST & 250 lb. SERVICE TEST - 100% polyester jacket with EPDM synthetic rubber lining. 1-1/2" diameter only.

MODEL SELECTION



POLY FLEX HOSE



- 2915** 1-1/2" w/ Brass Pin Lug Coupling
- 2916** 2-1/2" w/ Brass Pin Lug Coupling

SUPER POLY FLEX HOSE


- 2926** 1-1/2" w/ Brass Pin Lug Coupling

MODEL DIMENSIONS

Model No.	Coupling Size	Hose I.D.	Hose O.D.	Coupling
Rack and Reel Polyflex Hose 500 lb. Test				
2915	1-1/2"	1-1/2"	1-11/16"	2930
2916	2-1/2"	2-1/2"	2-13/16"	2936
				

Model No.	Coupling Size	Hose I.D.	Hose O.D.	Coupling
Rack and Reel Super Polyflex Hose 500 lb. Test				
2926	1-1/2"	1-1/2"	1-3/4"	2934
				

100% SYNTHETIC totally immune to mildew and rot, never needs drying.
100% POLYESTER will not mildew or decay with age. Resistant to many acids.

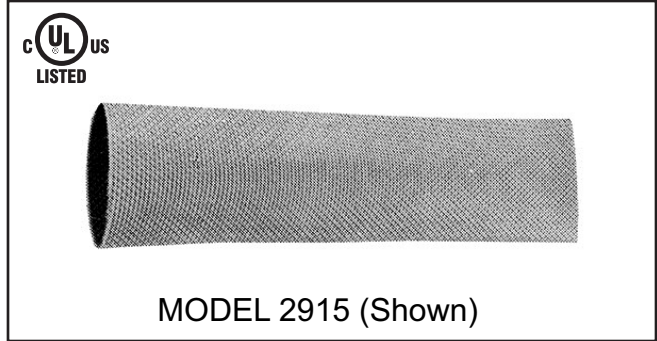

PRODUCT OPTIONS

LENGTHS:

- 50'
- 75'
- 100'

OPTIONS:

- U/L Label 500 PSI Acceptance Test
- U/L Label 300 PSI Acceptance Test (2915 & 2916 Models)
- 41 Aluminum Couplings

THREADS:

- N.S.T.
- Other _____

<p>Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer-Fire Pro assumes no responsibility for use of void or superceded data. © Copyright Potter Roemer- Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.</p> <p>2915 SERIES Date: 07/15/19</p>	<p>MEMBERSHIP</p>	  	  	<p>POTTER ROEMER/FIRE PRO</p> <p>Headquarters: P.O. Box 3527 City of Industry, CA 91744 U.S.A. Los Angeles Area 800-366-3473 626-855-4890</p> <p>Also in: New York (800) 526-4592 Chicago (800) 547-3473 Atlanta (800) 762-0542 Miami (866) 961-3473 Dallas (866) 644-3473</p> <p style="text-align: right;">www.potterroemer.com</p>
---	--------------------------	---	---	--