

SPECIFICATIONS

BOX

Cold rolled steel with an electrostatically applied, thermally-fused polyester coating with recoatable white finish, and a concealed hinge.

DOOR AND FRAME

Model 8220-8225: **Steel** - Cold rolled steel with recoatable white polyester finish

Model 8240-8245: **Aluminum** - Clear anodized finish

Model 8260-8265: **Stainless Steel** - #304 Stainless steel with #4 finish

Model 8280-8285: **Brass** - Polished finish, clear polyester coated

MODEL SELECTION

STEEL

8220 Recessed

8225 Recessed

ALUMINUM

8240 Recessed

8245 Recessed

STAINLESS STEEL

8260 Recessed

8265 Recessed

BRASS

8280 Recessed

8285 Recessed

PRODUCT OPTIONS

DOOR STYLES:

- DV Duo-Vertical Panel w/ Tempered Safety Glass
 -DVL Duo-Vertical Panel w/ Lock, TSG & Break Rite® Handle
 -F Flush Solid Metal
 -FS Flush Solid Metal w/ lock

GLAZING MATERIAL:

- 1 TS Bronze Tempered Safety Glass
 -2 TS Smoke Tempered Safety Glass
 -4 TS Obscure Tempered Safety Glass
 -6 1/8" Clear Acrylic
 -7 1/8" Bronze Acrylic
 -8 1/8" White Acrylic
 -9 1/8" Smoke Acrylic
 -10 1/8" Red Acrylic

DOOR AND FRAME FINISHES:

- STEEL: Any polyester paint color, if available; Provide mfg. name and color number
 -ALUMINUM: Light, Medium or Dark duranodic



PRODUCT OPTIONS (cont.)

- STAINLESS STEEL: Number 304 Stainless, with #8 mirror finish
 -BRONZE: U.S. # 10 Satin finish with clear coating, or dark oxidized, oil rubbed; specify
 -RED: For Red Polyester Finish, Add This Suffix
 -RR: For Rolled Radius Return, Add This Suffix
 CUSTOM _____

FIRE EXTINGUISHER LETTERING:

- HW Horizontal White
 -HB Horizontal Black
 -HR Horizontal Red
 -VW Vertical White
 -VB Vertical Black
 -VR Vertical Red
 -VAW Vertical Ascending White
 -VAB Vertical Ascending Black
 -VAR Vertical Ascending Red

FIRE EXTINGUISHER LETTERING:

- WH White
 -BH Black
 -RH Red

**NOTE: ALL GLASS DOOR STYLES PROVIDED WITH CLEAR TEMPERED SAFETY GLASS IN COMPLIANCE WITH ANSI Z97-1-1984

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.

8200 SERIES

Date: 09/19/18

MEMBERSHIP



FIRE EQUIPMENT
MANUFACTURERS'
ASSOCIATION



POTTER ROEMER/FIRE PRO

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890


Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (866) 961-3473
Dallas (866) 644-3473

www.potterroemer.com

MODEL DIMENSIONS

Model No.		Wall Mounting	Inside Box Dimensions			Overall Frame		Wall Opening Required			Trim	Inlet Location			Shelf	For Use With	ADA
Steel / Aluminum	Stainless Steel / Brass		K	L	M	N	O	W I D T H	H E I G H T	D E P T H		T	X	Y			
8220	8260	Recessed	18	18	8	20-1/2	20-1/2	19	19	8-1/2	5/8	4	4	9	-	2-1/2" Angle Valves	Yes
8225	8265	Recessed	14	40	8	16-1/2	42-1/2	15	41	8-1/2	5/8	4	4	9	12		Yes
8240	8280	Recessed	18	18	8	20-1/2	20-1/2	19	19	8-1/2	5/8	4	4	9	-	Up to 20lb. Dry Chem Fire Ext. & 2-1/2" Angle Valve	Yes
8245	8285	Recessed	14	40	8	16-1/2	42-1/2	15	41	8-1/2	5/8	4	4	9	12		Yes

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED

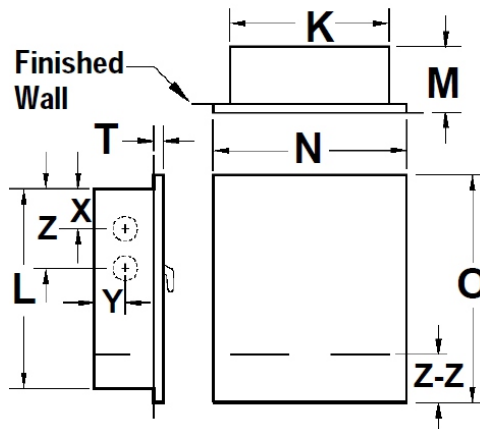

RECESSED

<p>Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.</p> <p>8200 SERIES Date: 09/19/18</p>	<p>MEMBERSHIP</p> 	<p>POTTER ROEMER/FIRE PRO</p> <p>Headquarters: P.O. Box 3527 City of Industry, CA 91744 U.S.A. Los Angeles Area 800-366-3473 626-855-4890</p> <p>Also in: New York (800) 526-4592 Chicago (800) 547-3473 Atlanta (800) 762-0542 Miami (866) 961-3473 Dallas (866) 644-3473</p> <p>www.potterroemer.com</p>
--	---	---