

SPECIFICATIONS

Potter Roemer/ Fire Pro® ball shutoffs are designed to be rugged and durable. Dual handles stops combined with “fast change” replacement seat feature makes them a versatile performer for all fire ground uses—simply remove the tail gasket and the rear seat and the ball will drop out.

Ball shutoffs are ideal for use in combination with fog tips, for economical breakaparts, and comply with all aspects of required U.S. Forest Service Specifications.




FP10R (Shown)


REGULARLY FURNISHED

- 6061 T-6 aluminum
- Dual handle stops
- Cast aluminum handle
- Hard anodized finish - red or gray
- “Fast Change” Delrin ball and seat

MODEL	INLET In (mm)	WEIGHT Lbs (kg)	WATERWAY In (mm)
FP10R	1" (25)	1-1/4 (0.6)	3/4" (19)
FP15	1-1/2" (38)	1-3/4 (0.8)	1" (25)

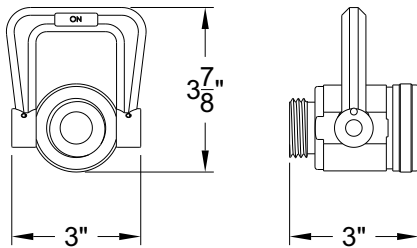

FP10R

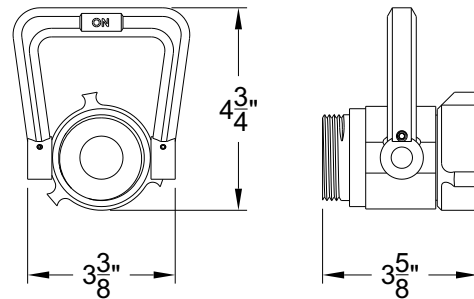

FP15

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacture's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superceded data. Please visit potterroemer.com for most current specifications

BS-FP10R

Revised: 09/05/18

MEMBERSHIP



FIRE EQUIPMENT
MANUFACTURERS'
ASSOCIATION

ONFSA
NATIONAL IRRI SPRINKLER ASSOCIATION, INC.



CASPE
American Society of
Plumbing Engineers



POTTER ROEMER/FIRE PRO

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (866) 961-3473
Dallas (866) 644-3473

www.potterroemer.com