

MINI CHARGER MONITOR

750 GPM


FP-750MC

SPECIFICATIONS

Potter Roemer/ Fire Pro® 4-wheel trailer portable monitors are designed for higher flow/reach requirements. The balanced flow single waterway design and precision machining on swivel joints reduces friction loss while improving stream and distance, and ensures ease of operation at all pressure/ flow ranges.

Carbon Steel construction with 304 stainless steel swivels. Standard red polyester powder coating inside and out protect against corrosion.

Type 304 stainless steel ball bearings in joints ensure easy movement and reliable operation.

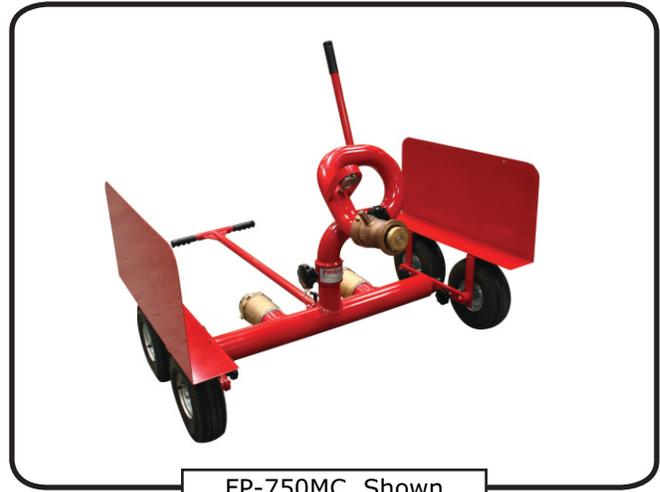

FP-750MC Shown

REGULARLY FURNISHED

- 2-1/2" Waterway
- Seamless carbon or stainless steel construction
- Zerk fitting for lubrication
- Low friction loss
- 80° horizontal and +20° vertical travel
- 750 GPM (2839 lpm)
- Wheel locks and low profile tires

MODEL	INLET In (mm)	OUTLET In (mm)	WEIGHT Lbs (kg)
FP-750MC	3" (76) Manifold w/ 2 x 2-1/2" (51 x 64) Female Swivel	2-1/2" (64)	110 (50)

PRODUCT OPTIONS

- Drainage Provisions
- Gauge and Guard
- Metric Flanges
- Parallel Handle
- Shut Off Valve
- Steering Wheel Handle

FINISHES:

- Customer Colors _____ (Specify)

