

SERIES FRC1500 FIRE RATED HOSE CABINETS

For Use with Class II 1 1/2" Hose Rack Assembly, Portable Fire Extinguisher, and 2 1/2" Fire Dept. Valve

CLASSIFIED BY UNDERWRITERS LABORATORIES INC*. for use in the through penetration fire stop systems. The applicable rating information is listed at 2 hours for flame, temperature, and/or hose stream. Fabricated of Galvanneated steel, 20ga. box, with knock out provision in inner box; (penetration of fire protection box, to accommodate piping, and the restoration of fire stop around penetration, shall be completed by installing contractor). 20 ga. tubular steel door with 18 ga. frame and a continuous steel hinge. Left hand hinge standard. All components are powder-coated with an electrostatically-applied, thermally-fused, recoatable white polyester finish. All glass door styles provided with clear tempered safety glass. Wall mounting and size of cabinet as selected by model number.

*UL Classified 7N43

MODEL SELECTION

- FRC1504 Recessed
- FRC1506 Recessed
- FRC1508 Recessed
- FRC1514 Trimless
- FRC1516 Trimless
- FRC1518 Trimless
- FRC1534 Semi-Recessed
- FRC1536 Semi-Recessed
- FRC1538 Semi-Recessed

DOOR STYLES (Select One)

- A Full Glass, w/ Tempered Safety Glass
- B Break-Glass, w/lock & Break Rite® Handle
- D Duo-Panel w/ Tempered Safety Glass
- DV Duo-Vertical Panel w/ Tempered Safety Glass
- DVL Duo-Vertical Panel w/ Lock, TSG & Break Rite® Handle.
- E Tempered Safety Glass (25 sq. in.) w/ Break Rite® Handle
- F Flush Solid Metal
- FS Flush Solid Metal w/ lock
- J Insert Panel
- (Specify) Optional inserts for glass-style doors
 - 5 Full Filled Wire Glass
 - 6 1/8" Clear Acrylic



MODEL FRC1506-A (Shown)

PRODUCT OPTIONS

DOOR AND FRAME MATERIAL:

- AL ALUMINUM: Clear Anodized Finish
Optional Duranodic Finish
 Light Medium Dark
- SS STAINLESS STEEL: 304 w/ #4 Finish
Optional Finish
 304 w/ #6 Dull Stain 304 w/ #8 Mirror
- PB BRASS: Polished Finish
- BZ BRONZE: Call for Options

OPTIONAL FINISHES TO DOOR AND FRAME ABOVE:

- RED: Powder Coat
- CUSTOM COLORS (Call for Options)

CABINET MODIFICATIONS:

- HF Horizontal Fold Cabinet
- FP Flush Pull Handle
- RIGHT Right Hand Hinge

If option not shown contact factory.

**NOTE: DOOR STYLES -A, -D, -DV, -F, & -J PROVIDED w/ LEVER HANDLE/CAM LATCH

**NOTE: ALL GLASS DOOR STYLES PROVIDED WITH CLEAR TEMPERED SAFETY GLASS IN COMPLIANCE WITH ANSI Z97-1-1984

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superceded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.

FRC1500 SERIES

Date: 07/17/24

MEMBERSHIP



POTTER ROEMER

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (833) 744-3473
Dallas (866) 644-3473



www.potterroemer.com

SERIES FRC1500 FIRE RATED HOSE CABINETS


MODEL DIMENSIONS

Model No.	Wall Mounting	Max. Capacity		Inside Box Dimensions			Overall Frame		Wall Opening Required			Trim	Inlet Location			
		Poly flex ft.	Super flex ft.	K	L	M	N	O	W I D T H	H E I G H T	D E P T H		T	W	X	Y
FRC1504	Recessed	75	50	30	36	8	33-3/4	39-3/4	32-1/4	38	9-1/8	5/8	4	4	4	4
FRC1506	Recessed	100	75	30	40	8	33-3/4	43-3/4	32-1/4	42	9-1/8	5/8	4	4	4	4
FRC1508	Recessed	100	100	30	44	8	33-3/4	47-3/4	32-1/4	46	9-1/8	5/8	4	4	4	4
FRC1514	Trimless	75	50	30	36	8	33	39	32-1/4	38	10-1/2	-	4	4	4	4
FRC1516	Trimless	100	75	30	40	8	33	43	32-1/4	42	7	-	4	4	4	4
FRC1518	Trimless	100	100	30	44	8	33	47	32-1/4	46	7	-	4	4	4	4
FRC1534	Semi-Recessed	75	50	30	36	8	33-1/2	39-1/2	32-1/4	38	7	2-3/4	4	4	4	4
FRC1536	Semi-Recessed	100	75	30	40	8	33-1/2	43-1/2	32-1/4	42	7	2-3/4	4	4	4	4
FRC1538	Semi-Recessed	100	100	30	44	8	33-1/2	47-1/2	32-1/4	46	7	2-3/4	4	4	4	4


ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED

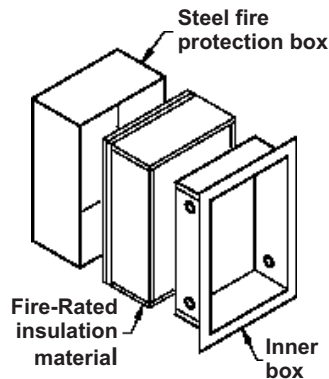

RECESSED



TRIMLESS



SEMI-RECESSED

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.

FRC1500 SERIES

MEMBERSHIP



FIRE EQUIPMENT MANUFACTURERS' ASSOCIATION

ONFSA NATIONAL IRRE SPRINKLER ASSOCIATION, INC.



CASPE American Society of Plumbing Engineers



POTTER ROEMER/FIRE PRO

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (833) 744-3473
Dallas (866) 644-3473

www.potterroemer.com