

## SPECIFICATIONS

CLASSIFIED BY UNDERWRITERS LABORATORIES INC. for use in the through penetration fire stop systems. The applicable rating information is listed at 2 hours for flame, temperature, and/or hose stream. 20 ga. tubular steel door with 18 ga. frame and a continuous steel hinge. All components are powder-coated with an electrostatically-applied, thermally-fused, recoatable white polyester finish. Clear, vacuum-formed, polycarbonate bubble. All glass door styles provided with clear tempered safety glass. Wall mounting and size of cabinet as selected by model number.

## REGULARLY FURNISHED

1770 Series- For use with 5 lb. or 10 lb. Portable Fire Extinguishers.

1780 Series- For use with 2-1/2" Gallon Water Fire Extinguishers or 20 lb. Dry Chemical Fire Extinguishers.

## MODEL SELECTION

- FRC1770 Recessed
- FRC1771 Trimless
- FRC1772 Semi-Recessed
- FRC1780 Recessed
- FRC1781 Trimless



## PRODUCT OPTIONS

### DOOR AND FRAME MATERIAL:

- AL ALUMINUM: Clear Anodized Finish
- SS STAINLESS STEEL: 304 w/ #4 Finish
- PB BRASS: Polished Finish
- BZ BRONZE: Call for Options

### FINISHES:

- ALUMINUM: Duranodic Finish
  - Light  Medium  Dark
- STAINLESS STEEL: Finish as Specified
  - 304 w/ #6 Dull Satin  304 w/ #8 Mirror
- RED: Powder Coat
- CUSTOMER COLORS \_\_\_\_\_ (Specify)

### DOOR STYLES:

- BA Full Bubble with Glass
- BB Break Bubble with Glass

### OPTIONAL BUBBLE COLOR:

- B Bronze
- S Smoke Grey

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superceded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit [potterroemer.com](http://potterroemer.com) for most current specifications.

**FRC1770 SERIES**

Date: 03/27/14

**MEMBERSHIP**



FIRE EQUIPMENT  
MANUFACTURERS'  
ASSOCIATION

**ONFSA**  
NATIONAL IRRIE SPRINKLER ASSOCIATION, INC.



**CASPE**  
American Society of  
Plumbing Engineers



**POTTER ROEMER/FIRE PRO**

Headquarters:  
P.O. Box 3527  
City of Industry, CA  
91744 U.S.A.  
Los Angeles Area  
800-366-3473  
626-855-4890



Also in:  
New York (800) 526-4592  
Chicago (800) 547-3473  
Atlanta (800) 762-0542  
Miami (866) 961-3473  
Dallas (866) 644-3473

[www.potterroemer.com](http://www.potterroemer.com)


**MODEL DIMENSIONS**

Model No.	Wall Mounting	Inside Box Dimensions			Overall Frame		Wall Opening Required			P R O J E C T I O N S	Trim T	For Use With These Extinguishers  Model No.
		K	L	M	N	O	W I D T H	H E I G H T	D E P T H			
FRC1770	Recessed	9	24	4	11-1/4	26-3/4	11-1/4	26	4-5/8	3	1/2	3002, 3005, 3006, 3010, 3302, 3305, 3306, 3310, 3405
FRC1771	Trimless	9	24	4	11-1/4	26-3/4	11-1/4	26	5-1/8	2-1/2	-	
FRC1772	Semi-Recessed	9	24	4	11-1/4	26-3/4	11-1/4	26	3-1/8	4-1/2	2	
FRC1780	Recessed	12	27	4-3/4	14-1/4	29-3/4	14-1/4	29	5-3/8	3-7/8	1/2	3020, 3202*, 3320 *For 3202 add 1" to "M" Dimension
FRC1781	Trimless	12	27	4-3/4	14-1/4	29-3/4	14-1/4	29	5-7/8	3-3/8	-	


ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED

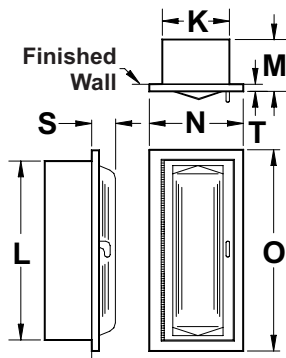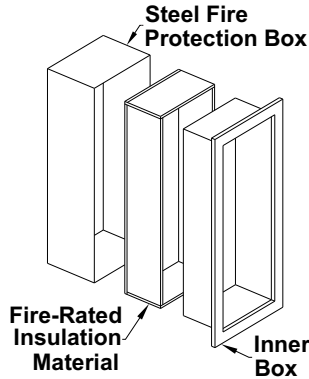

**RECESSED**

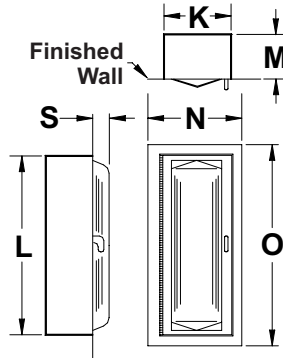

**TRIMLESS**

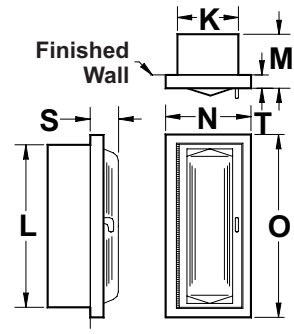

**SEMI-RECESSED**

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit [potterroemer.com](http://potterroemer.com) for most current specifications.

**FRC1770 SERIES**

Date: 03/27/14

**MEMBERSHIP**



FIRE EQUIPMENT  
MANUFACTURERS'  
ASSOCIATION



**POTTER ROEMER/FIRE PRO**

Headquarters:  
P.O. Box 3527  
City of Industry, CA  
91744 U.S.A.  
Los Angeles Area  
800-366-3473  
626-855-4890

Also in:  
New York (800) 526-4592  
Chicago (800) 547-3473  
Atlanta (800) 762-0542  
Miami (866) 961-3473  
Dallas (866) 644-3473

[www.potterroemer.com](http://www.potterroemer.com)