

SPECIFICATIONS

Potter Roemer/ Fire Pro® fog nozzles comply with all aspects of U.S. Forest Service specifications. 1-1/2" tip features constant flow, single gallonage, preset at either 60, 95 or 125 GPM. A "quick throw" pattern change from straight stream to fog pattern. Ideal for "mop up" or to conserve water in the low range.




FP60CGT (Shown)

REGULARLY FURNISHED

- Combination fog and straight stream
- Lightweight/strong aluminum
- Hard anodized finish - gray
- Full "boot style" neoprene bumper ring

MODEL	INLET In (mm)	WEIGHT Lbs (kg)	GPM (lpm)
FP60CGT	1-1/2" (38)	2-1/2 (1)	60 (227)
FP95CGT	1-1/2" (38)	2-1/2 (1)	95 (341)
FP125CGT	1-1/2" (38)	2-1/2 (1)	125 (473)

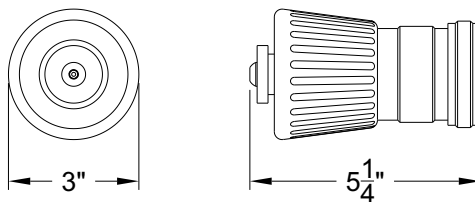

FP60CGT, FP95CGT & FP125CGT

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

<p>Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacture's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superceded data. Please visit potterroemer.com for most current specifications</p> <p>FT-FP60CGT Revised: 09/05/18</p>	<p>MEMBERSHIP</p> 	<p>POTTER ROEMER/FIRE PRO</p> <p>Headquarters: P.O. Box 3527 City of Industry, CA 91744 U.S.A. Los Angeles Area 800-366-3473 626-855-4890</p> <p>Also in: New York (800) 526-4592 Chicago (800) 547-3473 Atlanta (800) 762-0542 Miami (866) 961-3473 Dallas (866) 644-3473</p> <p>www.potterroemer.com</p>
--	---	---