

Used to House Sprinkler System Valving

SPRINKLER CONTROL VALVE CABINET, fabricated of Galvannealed Steel, 20 ga. box (18ga. surface mounted box), 20 ga. tubular door with 18 ga. frame and a continuous steel hinge. Left hand hinge standard. All components are powder-coated with an electrostatically-applied, thermally-fused, recoatable white polyester finish. Wall mounting and size of cabinet as selected by model number.



MODEL SVC1306-F (Shown)

MODEL SELECTION

- SVC1306** Recessed
- SVC1356** Surface
- SVC1508** Recessed
- SVC1558** Surface
- SVC1830** Recessed
- SVC1835** Surface

PRODUCT OPTIONS**DOOR AND FRAME MATERIAL:**

- AL ALUMINUM: Clear Anodized Finish
- SS STAINLESS STEEL: 304 w/ #4 Finish
- PB BRASS: Polished Finish
- BZ BRONZE: Call for Options

FINISHES:

- ALUMINUM: Duranodic Finish
 - Light Medium Dark
- STAINLESS STEEL: Finish as Specified
 - 304 w/ #6 Dull Satin 304 w/ #8 Mirror
- RED: Powder Coat
- CUSTOMER COLORS _____ (Specify)

PRODUCT OPTIONS (cont.)**CABINET MODIFICATIONS:**

- 12" Inside Box Depth

DOOR STYLES:

- A Full Glass, w/ Tempered Safety Glass
- B Break-Glass, w/lock & Break Rite® Handle
- D Duo-Panel w/ Tempered Safety Glass
- DV Duo-Vertical Panel w/ Tempered Safety Glass
- DVL Duo-Vertical Panel w/ Lock, TSG & Break Rite® Handle
- E Tempered Safety Glass (25 sq. in.) w/ Break Rite® Handle
- F Flush Solid Metal
- FS Flush Solid Metal w/ lock
- (Specify) Optional inserts for glass-style doors

LETTERING:

- SC SPRINKLER CONTROL ASSEMBLY
- FCV FIRE SPRINKLER FLOOR CONTROL VALVES

**NOTE: DOOR STYLES -A, -D, -DV, & -F PROVIDED w/ LEVER HANDLE/CAM LATCH

**NOTE: ALL GLASS DOOR STYLES PROVIDED WITH CLEAR TEMPERED SAFETY GLASS IN COMPLIANCE WITH ANSI Z97-1-1984

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.

SVC1306-SVC1835 SERIES Date: 10/17/24

MEMBERSHIP

**FIRE EQUIPMENT
MANUFACTURERS'
ASSOCIATION**

ONFSA
NATIONAL IRRIE SPRINKLER ASSOCIATION, INC.



CASPE
American Society of
Plumbing Engineers

**POTTER ROEMER**

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (833) 744-3473
Dallas (866) 644-3473


www.potterroemer.com

MODEL DIMENSIONS

Model No.	Wall Mounting	Inside Box Dimensions			Overall Frame		Wall Opening Required			Trim
		A	B	C *	D	E	W I D T H	H E I G H T	D E P T H *	T
SVC1306	Recessed	30	40	10	33-3/4	43-3/4	32	41	10-1/2	5/8
SVC1356	Surface	32	42	11-1/4	-	-	-	-	-	-
SVC1508	Recessed	30	44	10	33-3/4	47-3/4	31	45	10-1/2	5/8
SVC1558	Surface	32	46	11-1/4	-	-	-	-	-	-
SVC1830	Recessed	24	24	10	27-3/4	27-3/4	25	25	10-1/2	5/8
SVC1835	Surface	26	26	11-1/4	-	-	-	-	-	-

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED

* Add 2" for 12" Inside Box Depth

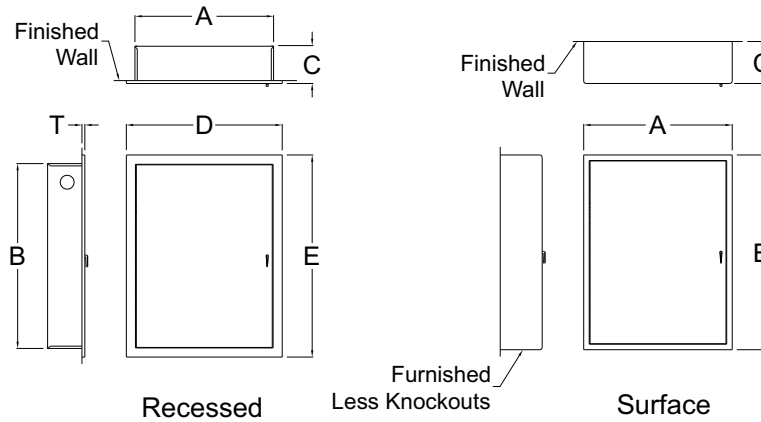

<p>Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer-Fire Pro assumes no responsibility for use of void or superceded data. © Copyright Potter Roemer- Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.</p> <p>SVC1306-SVC1835 SERIES</p>	<p>MEMBERSHIP</p>	<p>POTTER ROEMER</p> <p>Headquarters: P.O. Box 3527 City of Industry, CA 91744 U.S.A. Los Angeles Area 800-366-3473 626-855-4890</p> <p>Also in: New York (800) 526-4592 Chicago (800) 547-3473 Atlanta (800) 762-0542 Miami (833) 744-3473 Dallas (866) 644-3473</p> <p>www.potterroemer.com</p>
--	--------------------------	--